


FLASH CURE FOR INTERMEDIATE DRYING SYSTEM



OPTIONAL ACCESSORIES



KIT STAFFE




START CABLE




PHOTOCELL



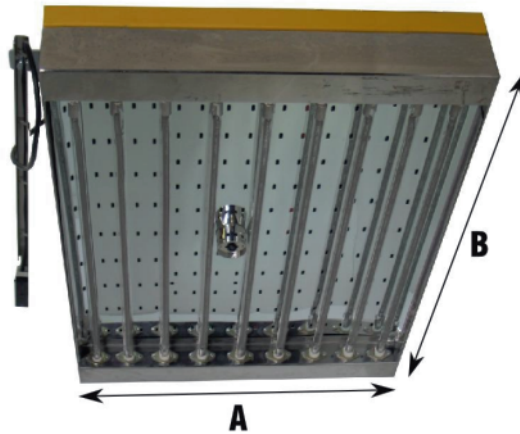

Magic Compatto – Lower side

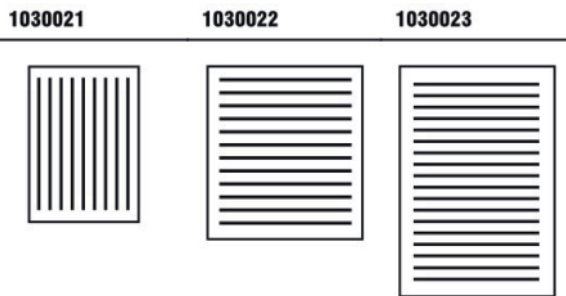

Magic Compatto – Lamps layout

MODEL	500/500	500/700	500/1000
POWER SUPPLY	400 V + N + PE	400 V + N + PE	400 V + N + PE
POWER INPUT	9 kW	12 kW	18 kW
WIDTH (A)	465 mm	660 mm	660 mm
LENGTH (B)	660 mm	735 mm	980 mm
HEIGHT	200 mm	200 mm	200 mm
NUMBER OF LAMPS	9	12	18
WEIGHT	15 kg	12 kg	25 kg
CODE	1030021	1030022	1030022

FEATURES

This product is particularly suitable for use on automatic printing machines. It ensures easy use, low consumption and high performance.

An IR optics pyrometer instantly detects the ink temperature and stops the heating when the required temperature is reached, thus preventing the fabric from burning.

The traditional timed-system can be used instead of the temperature control.

Magic Compatto works with photocell or start cable connected directly to the machine.

It is possible to operate with a number of lamp units always keeping the central ones switched on.

ADVANTAGES

The air circulation facilitates drying of all kinds of ink.

The lamps contained in Magic Compatto are made of tungsten in vacuum, a special feature which increases the life and switching on speed.

It can be installed in place of the printing panel on all those machines which do not have temporary halt.

By working with temperature control, Magic Compatto automatically reduces the switching-on times when the printing tables are heated.