


PICCOLO Dryer

Electric Radiant Panels Dryer

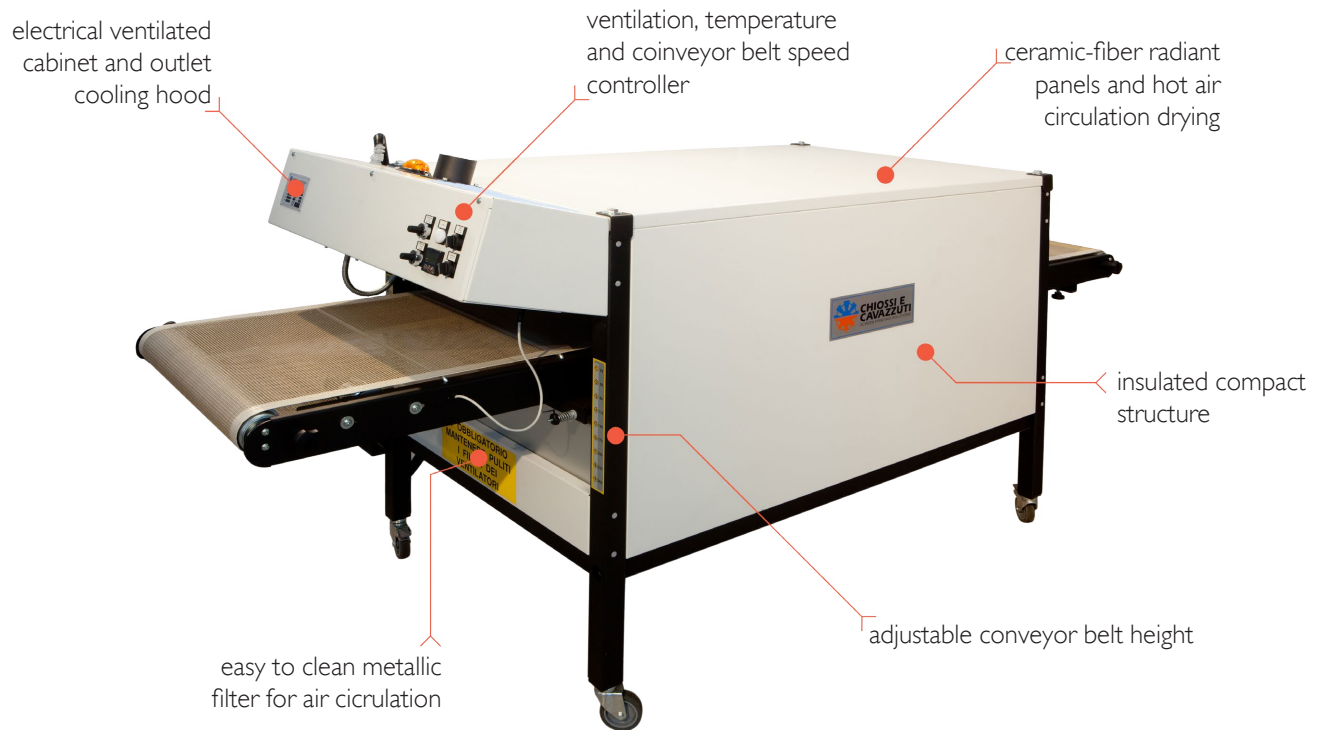

Features

The dryer "Piccolo" is a high quality product, designed to dry inks printed on fabric, both Plastisol and water-based.


- The dryer reaches the operating temperature in a few minutes thanks to its lightweight and compact structure.
- Three ceramic fiber radiant panels, combined with hot air circulation, plus two infra-red side lamps (optional).
- Limited risk of damaging the fabrics, thanks to the kind of wave-length, which heats dark and light colours almost in the same way.
- The temperature can be regulated with precision, due to a feeler which measures the temperature on the radiating panel.
- The ventilation speed is adjustable, in order to homogenize the temperature and respect delicate materials.
- A blow of fresh air cools the products going out of the furnace and avoids that they deform or stick to one another.
- Toothed track system to change the height of the tunnel in 9 position, ranging 20 to 260mm of distance from the radiant panels.
- It is provided with a cooling hood at the dryer outlet and an extractor fan for the expulsion of exhaust fumes.
- A filter with stainless steel net, easy to remove and clean, protects the air mixing fan.
- Optional lateral lamps to dry products on the side.

Optionals

- Optional side Lamps
- Conveyor belt of different size

Chiossi e Cavazzuti s.r.l.

Via Costituzione 50/D 42015 Correggio (RE) Italy - tel. +39 0522 637224 fax. +39 0522 631180 - cc@chiossiecavazzuti.com - www.chiossiecavazzuti.com



Advantages

- dry both Plastisol and water-based
- both radiant-panels and hot-air curing system
- precise temperature and ventilation control
- 9 conveyor belt distances, from 20mm to 260mm
- middle-waves radiations dry dark and light garment the same way
- provided with cooling hood, fumes extractor and metallic mesh filter
- a built-in draft tube removes the bad smells of the inks
- low consumption ideal for small business
- compact and lightweight structure
- unique and uniform air ventilation



TECHNICAL DATA	PICCOLO
Electrical Requirements	400V 3P+N+PE 11 A + 1,75 A for each optional lamp
Exhaust Specification	200 m ³ /h Ø 80 mm
Max Temperature	200°C
Power Consumption	7900 W + 1300 W for each lamp
Belt Width [mm]	600
Chamber Length [mm]	1500
Production*	200 pieces/h
Dimension**(LxWxH)[mm]	2700x900x1220
Shipping Weight	200 kg
* Theoretical Production on T-shirt with A4 print size - 1,5 minutes curing time	
** Dimension can change accordingly to entry or exit opening extensions	